

# ANT-LTE-VDP-2000-SMA

## Data Sheet



### Product Description

The Linx VDP Series antenna is a highly versatile antenna, offering high performance in a wide range of applications as well as an industrial ruggedness at a commercial price point. These durable, low profile, IP67, UV, and extended temperature rated robust antennas mount to non-conductive surfaces with an integrated PSA adhesive patch and have a vertical cable egress. With two meters of low loss cable, the VDP Series antenna can be located remotely from the radio and positioned for optimal performance. The VDP Series offers a very rugged solution at a fraction of the cost of competitive options.

The VDP Series LTE antenna supports all common LTE frequency bands making it ideal for LTE, CAT-M1 and NB-IOT applications as well as 2G and 3G systems. It is easily customized with different cable lengths and connectors for volume orders. Contact Linx for details.



### Features

- Covers all common 4G/3G/2G LTE bands
- Fully weatherized - UV protected, IP67, wide temperature range
- Low Loss cable for better RF performance at higher frequency bands


### Ordering Information

ANT-LTE-VDP-2000-SMA


### Electrical Specifications

Electrical Specifications				
Parameter	LTE/ GSM850/ GSM900	DCS/ PCS/ UMTS1	LTE 2300	LTE 2600
Recommended Frequency Range	698 – 960	1710 – 2170	2300 – 2400	2500 – 2700
VSWR	<1.7:1	<1.3:1	<1.4:1	<1.25:1
Peak Gain	4.5dBi	3.5dBi	1.5dBi	4.0dBi
Average Gain	-2.5dBi	-4.0dBi	-5.5dBi	-5.0dBi
Efficiency	55%	40%	30%	30%
Polarization	Linear			
Radiation	Omni-Directional			
Max Power	10W			
Wavelength	½-wave			
Impedance	50-ohms			
Cable	2m of Low Loss RG-174/U			
Connection	SMA Plug (Male)			
Mounting Type	Adhesive			
Weight	49g (1.7oz.)			
Operating Temperature Range	-40°C to +85°C			


## Dimensions

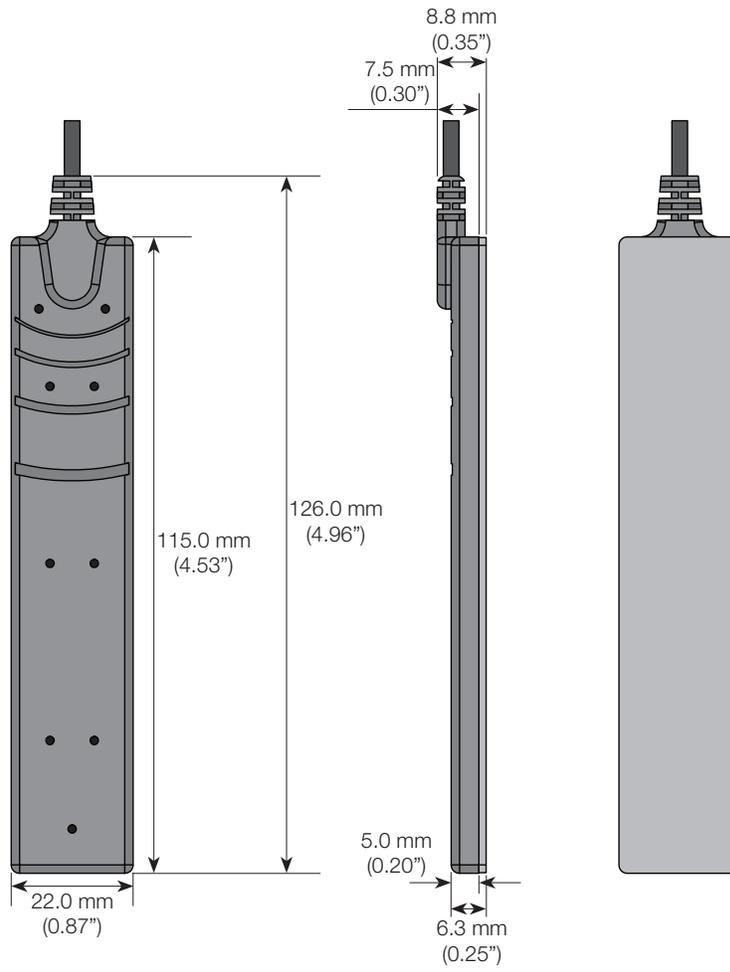

## VSWR Graph

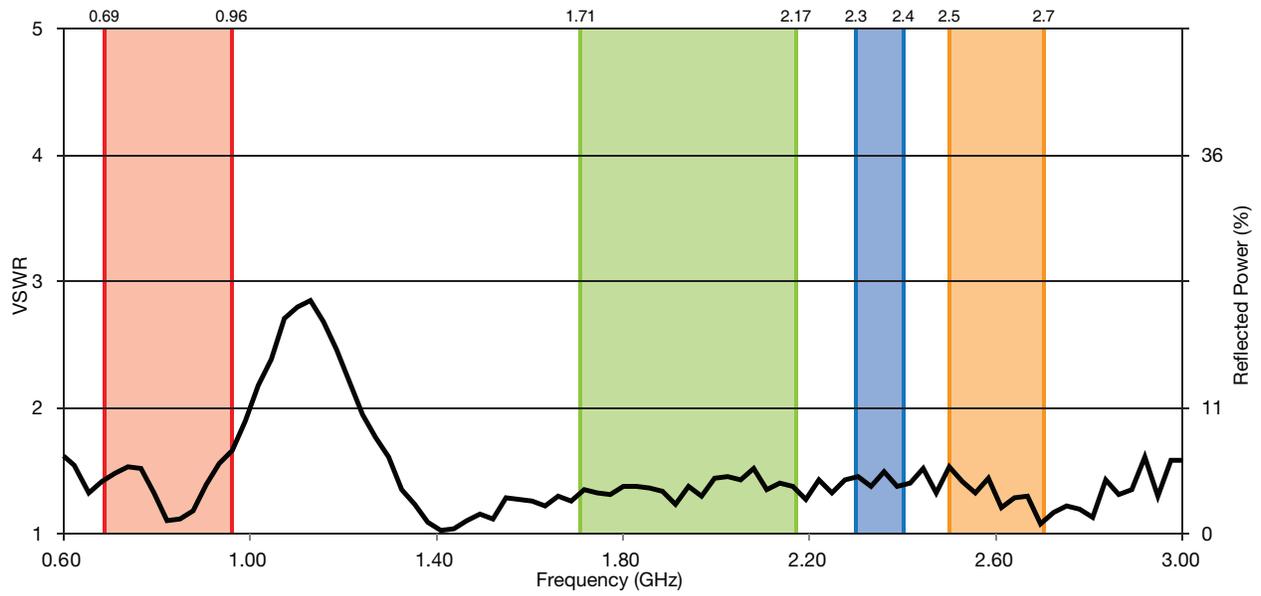

## Return Loss

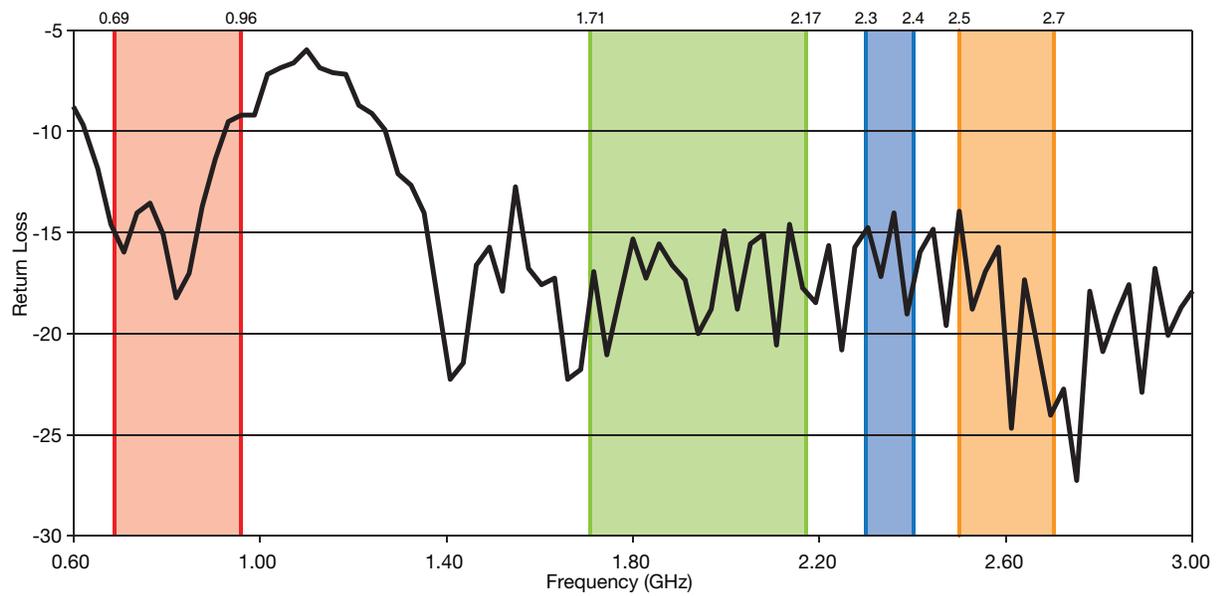


## Gain Plots



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 700 - 960MHz

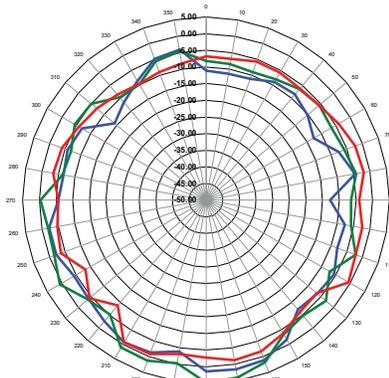

XZ-Plane Gain

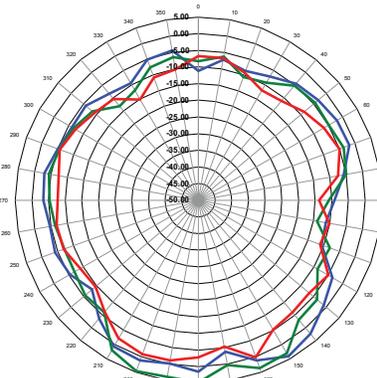


YZ-Plane Gain

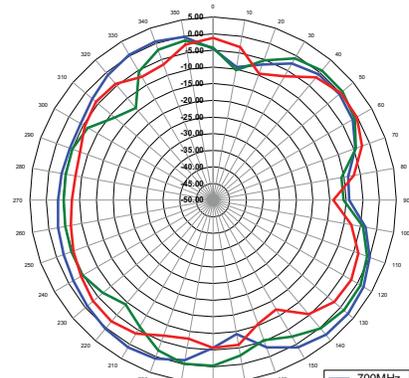


XY-Plane Gain




### 1710 - 2170MHz

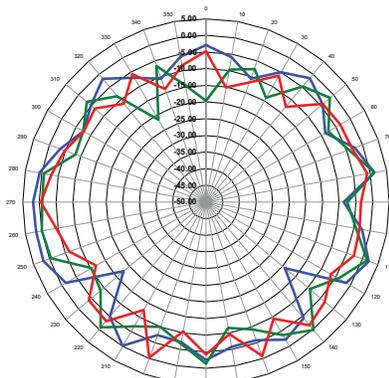

XZ-Plane Gain

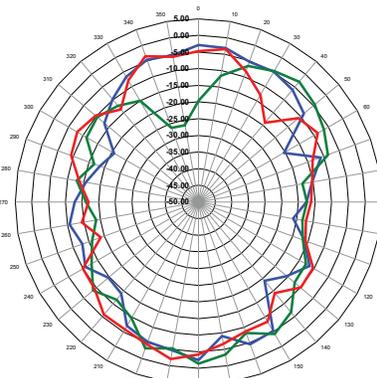

YZ-Plane Gain

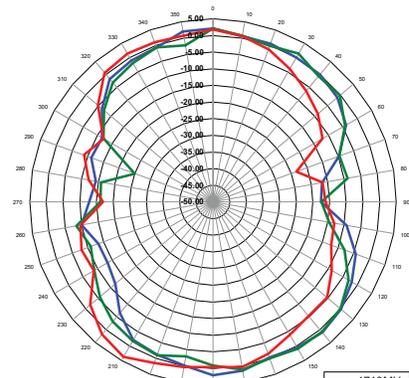

XY-Plane Gain




## Gain Plots



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 2300 - 2400MHz

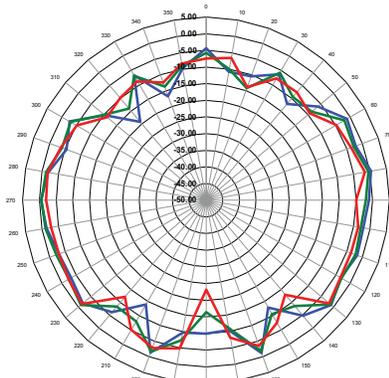

XZ-Plane Gain

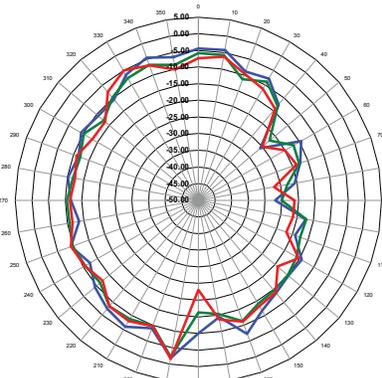


YZ-Plane Gain

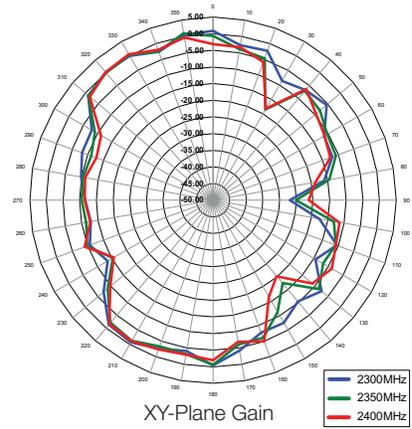


XY-Plane Gain




### 2500 - 2700MHz

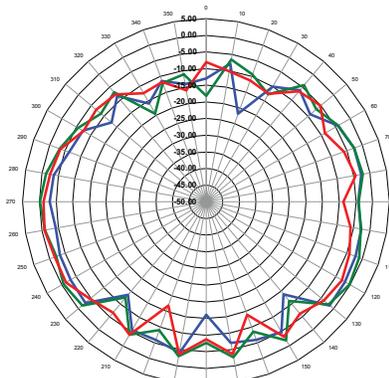

XZ-Plane Gain

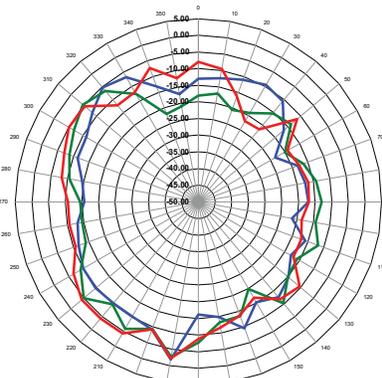


YZ-Plane Gain

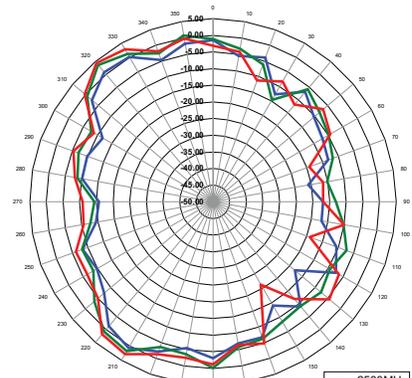


XY-Plane Gain




## Peak Gain

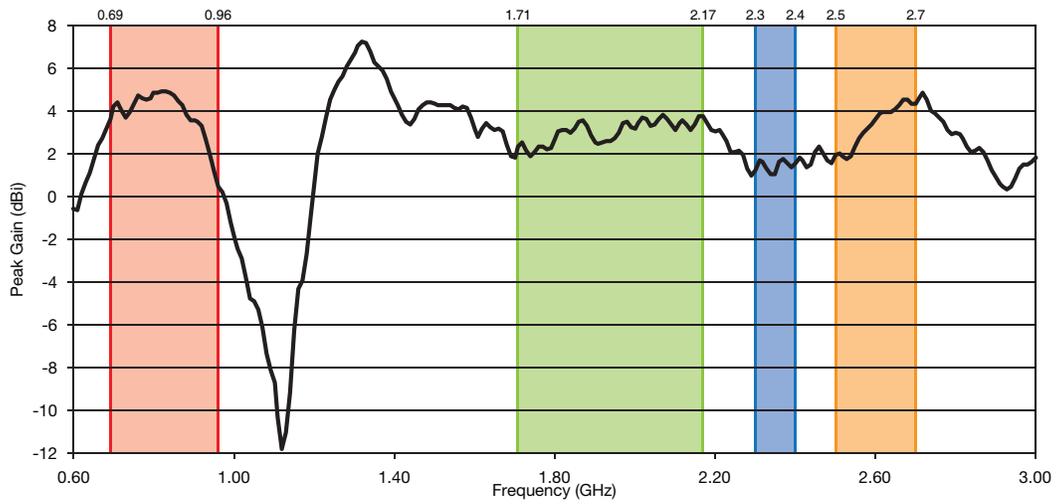

## Average Gain

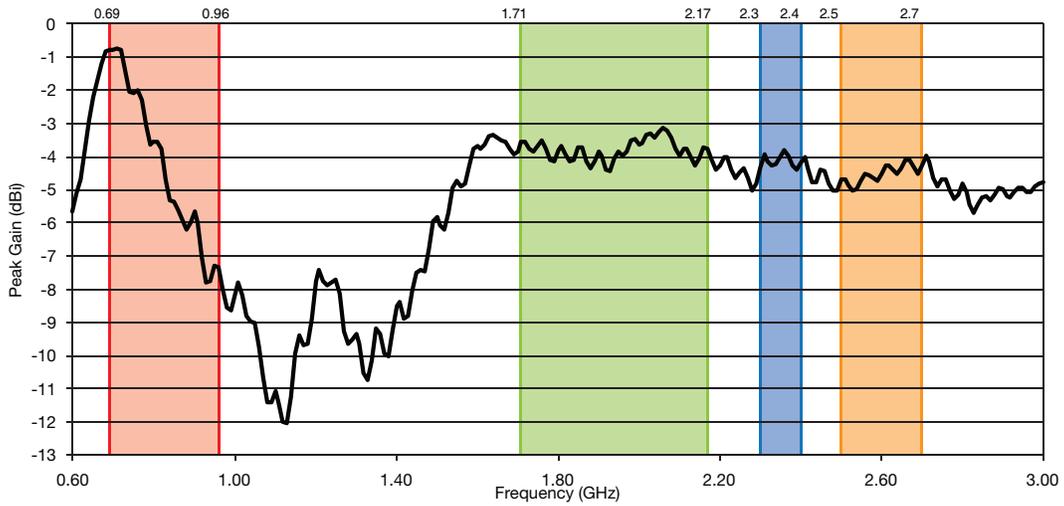

## Radiation Efficiency

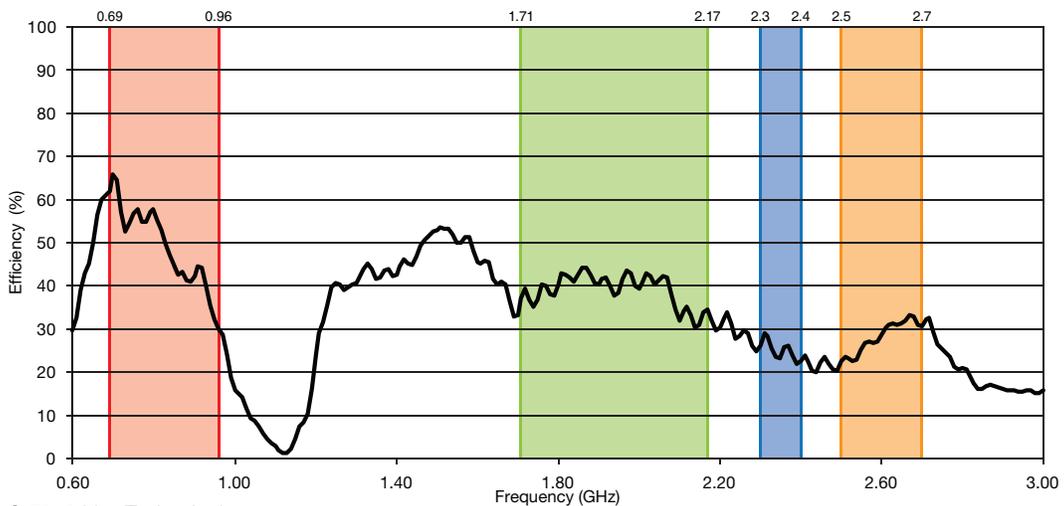

Copyright © 2018 Linx Technologies

159 Ort Lane, Merlin, OR 97532  
 Phone: +1 541 471 6256  
 Fax: +1 541 471 6251  
 www.linxtechnologies.com

## Product Description

The Linx VDP Series antenna is a highly versatile antenna, offering high performance in a wide range of applications as well as an industrial ruggedness at a commercial price point. These durable, low profile, IP67, UV, and extended temperature rated robust antennas mount to non-conductive surfaces with an integrated PSA adhesive patch and have a vertical cable egress. With two meters of low loss cable, the VDP Series antenna can be located remotely from the radio and positioned for optimal performance. The VDP Series offers a very rugged solution at a fraction of the cost of competitive options.


The dual-band VDP Series antenna supports legacy 2.4GHz applications and newer 5.8GHz band applications in a single, compact antenna. This makes it ideal for dual-band Wi-Fi and 802.11a U-NII as well as traditional technologies such as Thread, ZigBee, Bluetooth and 802.15.4 applications. It is easily customized with different cable lengths and connectors for volume orders. Contact Linx for details.

## Features

- Tri-band (2.4–2.5GHz, 5.125–5.725GHz and 5.725–5.875GHz)
- Fully weatherized - UV protected, IP67, wide temperature range
- Low Loss cable for better RF performance at higher frequency bands
- Center-fed from the end
- Omni-directional pattern
- Durable & unobtrusive
- SMA or RP-SMA connector

## Ordering Information

ANT-2/5-VDP-2000-SMA (with SMA connector)  
 ANT-2/5-VDP-2000-RPS (with RP-SMA connector)

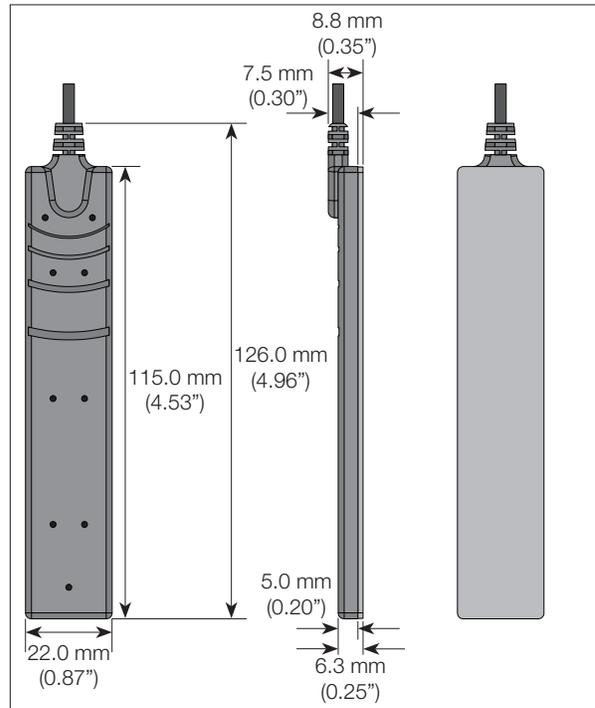


## Electrical Specifications

Center Frequency:	Band 1: 2450MHz Band 2: 5425MHz Band 3: 5800MHz
Recom. Freq. Range:	Band 1: 2400–2500MHz Band 2: 5125–5725MHz Band 3: 5725–5875MHz
Bandwidth:	Band 1: 100MHz Band 2: 600MHz Band 3: 150MHz
Wavelength:	½-wave
VSWR:	≤1.9 typical
Peak Gain:	Band 1: 2.0dBi Band 2: -0.5dBi Band 3: -0.5dBi
Impedance:	50-ohms
Max Power:	10W
Cable:	2m Low Loss RG-174/U
Connection:	SMA or RP-SMA
Oper. Temp. Range:	-40°C to +85°C
UV Resistance:	UL 2556 section 4.2.8.5 or equivalent




## Gain Plots

### 2400 - 2500MHz

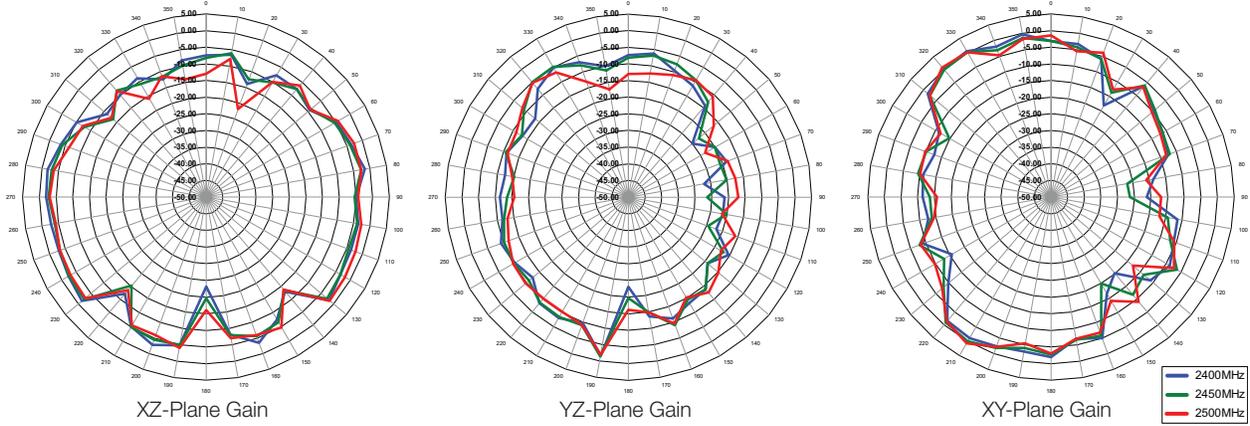

### 5720 - 5880MHz

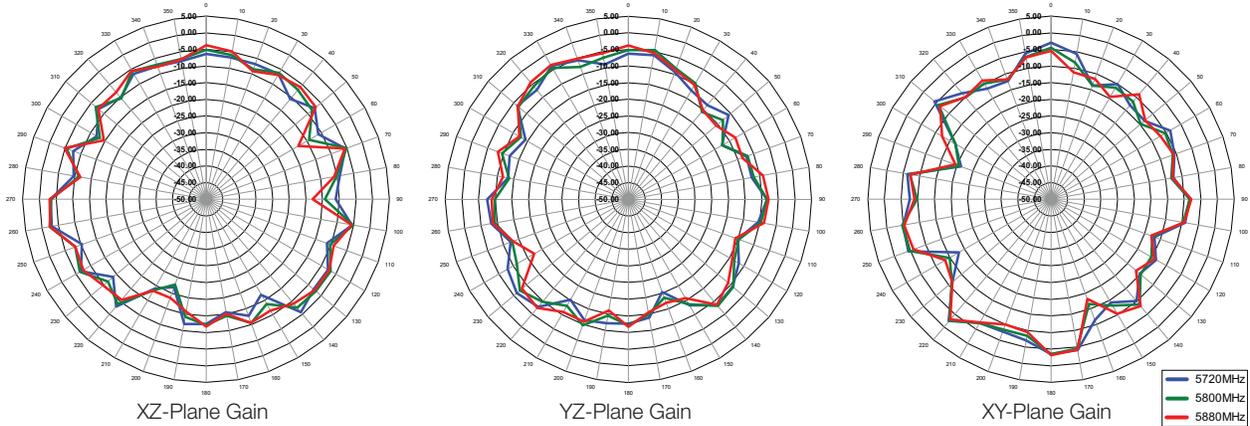

XZ-Plane Gain



YZ-Plane Gain



XY-Plane Gain


## Performance in the U-NII Band



XZ-Plane Gain




YZ-Plane Gain




XY-Plane Gain


### 5120 - 5720MHz

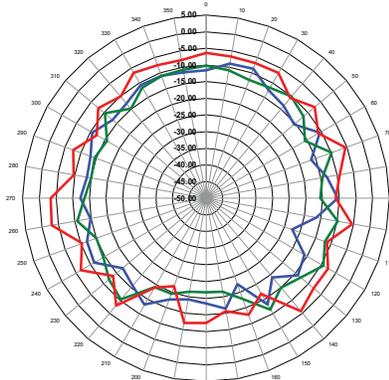

XZ-Plane Gain

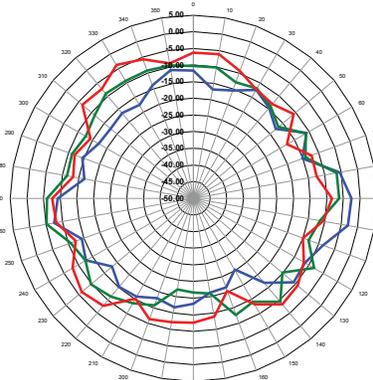

YZ-Plane Gain

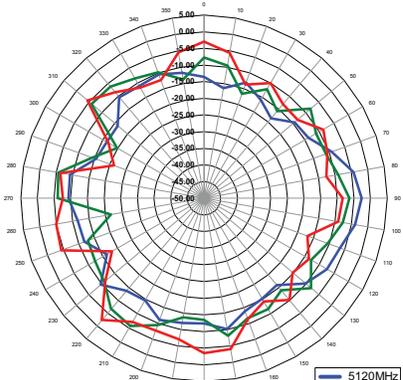


XY-Plane Gain



### VSWR

▽ 1.265 Reflected Power

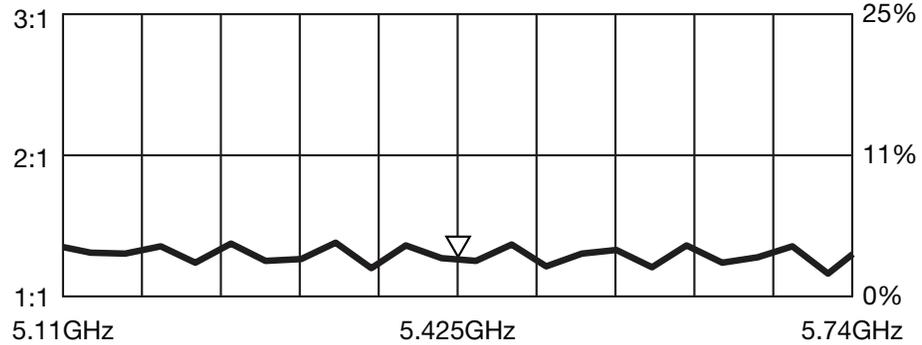


## About Gain Plots

The true measure of the effectiveness of an antenna in any given application is determined by the gain and radiation pattern measurement. For antennas gain is typically measured relative to a perfect (isotropic) radiator having the same source power as the antenna under test, the units of gain in this case will be decibels isotropic (dBi). The radiation pattern is a graphical representation of signal strength measured at fixed distance from the antenna.

Gain when applied to antennas is a measure of how the antenna radiates and focuses energy into free space. Much like a flashlight focuses light from a bulb in a specific direction, antennas focus RF energy into specific directions. Gain in this sense refers to an increase in energy in one direction over others.

It should also be understood that gain is not “free”, gain above 0dBi in one direction means that there must be less gain in another direction. Pictorially this can be pictured as shown in the figures to the right. The orange pattern represents the radiation pattern for a perfect dipole antenna, which is shaped like a donut. The pattern for an omnidirectional antenna with gain is shown in blue. The gain antenna is able to work with a device located further from the center along the axis of the pattern, but not with devices closer to the center when they are off the axis – the donut has been squished.

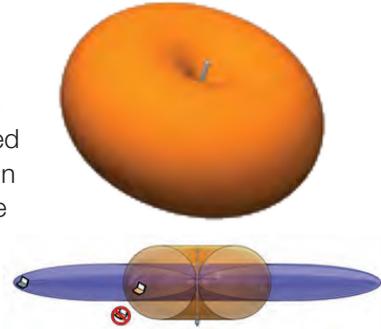

Gain is also related to the overall physical size of the antenna, as well as surrounding materials. As the geometry of the antenna is reduced below the effective wavelength (considered an electrically small antenna) the gain decreases. Also, the relative distance between an electrically small antenna and its associated ground impacts antenna gain.

## Product Description

The Linx VDP Series antenna is a highly versatile antenna, offering high performance in a wide range of applications as well as an industrial ruggedness at a commercial price point. These durable, low profile, IP67, UV, and extended temperature rated robust antennas mount to non-conductive surfaces with an integrated PSA adhesive patch and have a vertical cable egress. With two meters of low loss cable, the VDP Series antenna can be located remotely from the radio and positioned for optimal performance. The VDP Series offers a very rugged solution at a fraction of the cost of competitive options.


The dual-band VDP Series supports the 868MHz and the 915MHz bands, covering the most popular global sub-GHz unlicensed bands in a single, compact antenna. This makes it ideal for products that are sold into different regions worldwide using popular sub-GHz technologies, such as LoRa, SigFox, 802.15.4 and proprietary systems. It is easily customized with different cable lengths and connectors for volume orders. Contact Linx for details.

## Features

- Dual-band (863–873MHz and 902–928MHz)
- Fully weatherized - UV protected, IP67, wide temperature range
- Low Loss cable for better RF performance at higher frequency bands
- Center-fed from the end
- Omni-directional pattern
- Durable & unobtrusive
- SMA or RP-SMA connector

## Ordering Information


ANT-8/9-VDP-2000-SMA (with SMA connector)  
 ANT-8/9-VDP-2000-RPS (with RP-SMA connector)

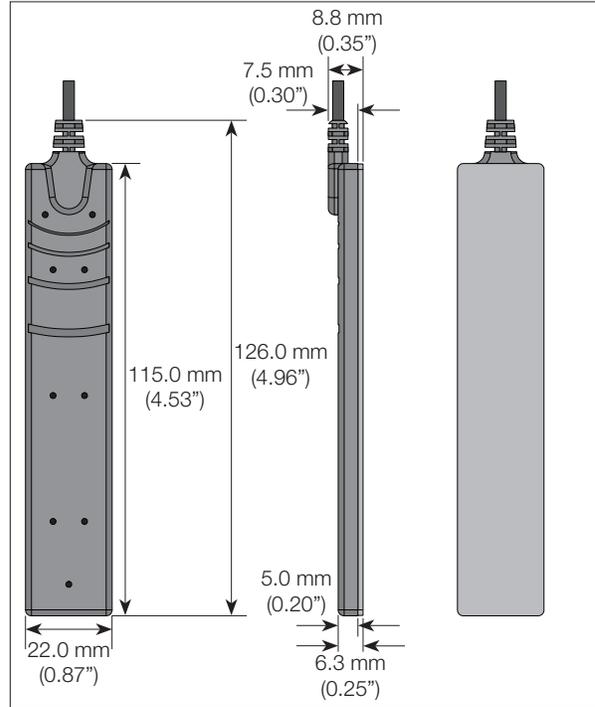

## Electrical Specifications

Center Frequency:	Band 1: 868MHz Band 2: 915MHz
Recom. Freq. Range:	Band 1: 863–873MHz Band 2: 902–928MHz
Bandwidth:	Band 1: 10MHz Band 2: 26MHz
Wavelength:	½-wave
VSWR:	≤1.9 typical
Peak Gain:	Band 1: 4.3dBi Band 2: 3.5dBi
Impedance:	50-ohms
Max Power:	10W
Cable:	2m Low Loss RG-174/U
Connection:	SMA or RP-SMA
Oper. Temp. Range:	–40°C to +85°C
UV Resistance:	UL 2556 section 4.2.8.5 or equivalent

## VSWR Graph

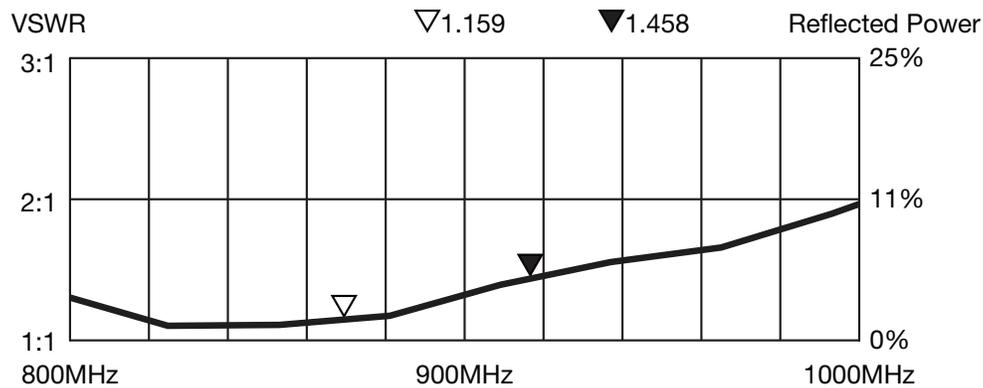

### What is VSWR?


The Voltage Standing Wave Ratio (VSWR) is a measurement of how well an antenna is matched to a source impedance, typically 50-ohms. It is calculated by measuring the voltage wave that is headed toward the load versus the voltage wave that is reflected back from the load. A perfect match has a VSWR of 1:1. The higher the first number, the worse the match, and the more inefficient the system. Since a perfect match cannot ever be obtained, some benchmark for performance needs to be set. In the case of antenna VSWR, this is usually 2:1. At this point, 88.9% of the energy sent to the antenna by the transmitter is radiated into free space and 11.1% is either reflected back into the source or lost as heat on the structure of the antenna. In the other direction, 88.9% of the energy recovered by the antenna is transferred into the receiver. As a side note, since the “:1” is always implied, many data sheets will remove it and just display the first number.

### How to Read a VSWR Graph


VSWR is usually displayed graphically versus frequency. The lowest point on the graph is the antenna’s operational center frequency. In most cases, this is different than the designed center frequency due to fabrication tolerances. The VSWR at that point denotes how close to 50-ohms the antenna gets. Linx specifies the recommended bandwidth as the range where the typical antenna VSWR is less than 2:1.

## Gain Plots

### 860 - 870MHz

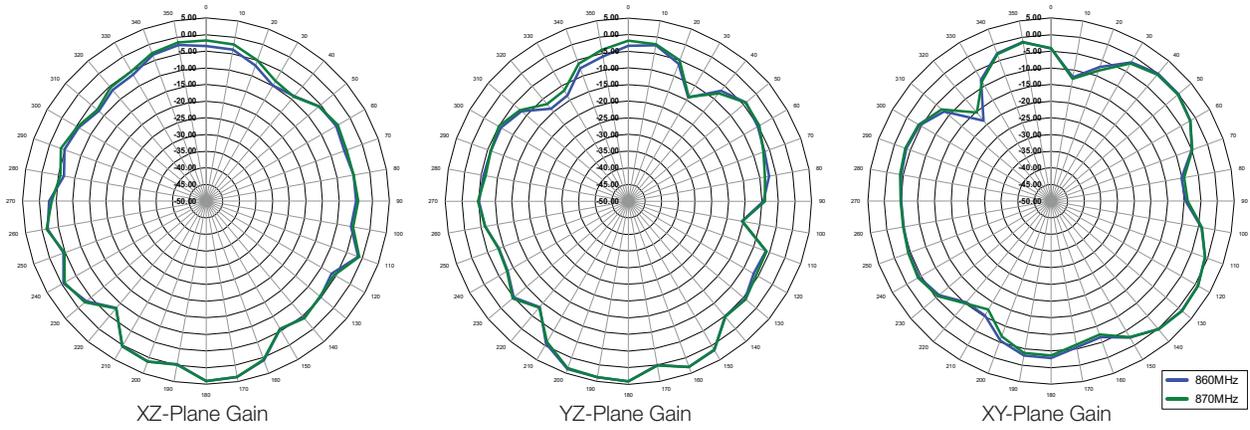


### 900 - 930MHz

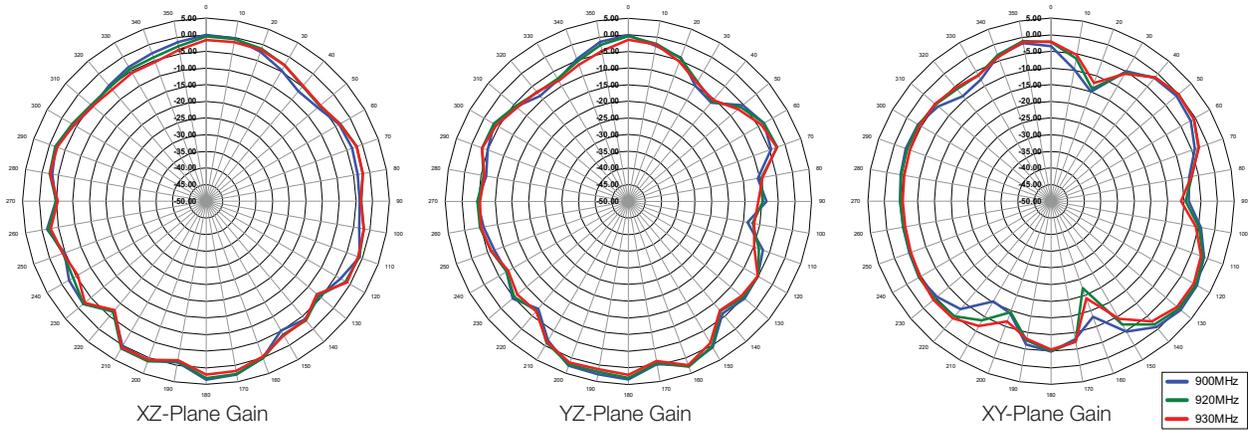

XZ-Plane Gain



YZ-Plane Gain




XY-Plane Gain

## About Gain Plots

The true measure of the effectiveness of an antenna in any given application is determined by the gain and radiation pattern measurement. For antennas gain is typically measured relative to a perfect (isotropic) radiator having the same source power as the antenna under test, the units of gain in this case will be decibels isotropic (dBi). The radiation pattern is a graphical representation of signal strength measured at fixed distance from the antenna.

Gain when applied to antennas is a measure of how the antenna radiates and focuses energy into free space. Much like a flashlight focuses light from a bulb in a specific direction, antennas focus RF energy into specific directions. Gain in this sense refers to an increase in energy in one direction over others.

It should also be understood that gain is not “free”, gain above 0dBi in one direction means that there must be less gain in another direction. Pictorially this can be pictured as shown in the figures to the right. The orange pattern represents the radiation pattern for a perfect dipole antenna, which is shaped like a donut. The pattern for an omnidirectional antenna with gain is shown in blue. The gain antenna is able to work with a device located further from the center along the axis of the pattern, but not with devices closer to the center when they are off the axis – the donut has been squished.

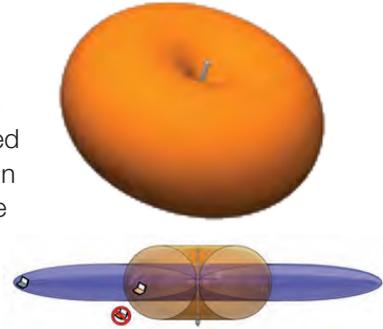

Gain is also related to the overall physical size of the antenna, as well as surrounding materials. As the geometry of the antenna is reduced below the effective wavelength (considered an electrically small antenna) the gain decreases. Also, the relative distance between an electrically small antenna and its associated ground impacts antenna gain.